

AmVault Composite Safes



During extreme testing procedures, **AMVAULT COMPOSITE SAFES** demonstrated the ability to withstand severe attacks by experienced U.L. experts using powerful tools such as sledgehammers, power saws, carbide disc cutters, drills, etc., and without fail, were awarded the U.L. TL-15 and TL-30 labels. Besides withstanding the most concentrated attacks by sophisticated burglars, each AMVAULT safe offers a Two Hour, 350° F factory fire test certification, ensuring the protection of the vault's contents against intense fires.

DOOR:

- Overall thickness of 5³/₄" and is constructed with a 2³/₄" defense barrier of outer and inner steel plates creating a single structure enclosing a unique, high density fire and burglary resistant composite material.
- Defense barrier houses a proprietary amalgamation of nuggets and steel fibers to withstand concentrated attacks with the most sophisticated equipment used by burglars today.
- The AmVault TL-30 offers a massive solid steel hard plate covering the entire door.

BODY:

- The AmVault formed body has a total protective thickness of 3¹/₂" enclosing a high density fire resistant composite material with nuggets and steel fibers.
- A reinforced drill resistant door frame protects the door and each individual bolt chamber from severe side attacks.
- A proprietary inner barrier protects against peeling attacks.
- High strength adjustable shelves.

FIRE ENDURANCE:

- Two hour, 350°F factory fire rating. Tested at temperatures up to 1850°F

LOCKING MECHANISM:

- Equipped with six to ten massive 1¹/₂" diameter chrome plated solid steel locking bolts. Each bolt moves deep into the body's protected bolt chambers.
- Entire bolt work mechanism is also protected by a spring operated bolt work detent system. Bolts stay in the retracted position when the door is opened and automatically engage when the door is closed.

THREE-WAY BOLTWORK OPTION (TL-30 ONLY):


- Safes can be equipped with a three way active bolt work mechanism engaging the bolts horizontally and vertically into the body of the safe.

LOCKS:

- Equipped with a U.L. listed Group II key changeable combination lock. The lock is protected by a massive drill shattering hard plate and two additional spring-loaded devices.

HINGES:

- Offers a vertical height adjustment and utilizes an oil impregnated bearing ensuring easy door operation.

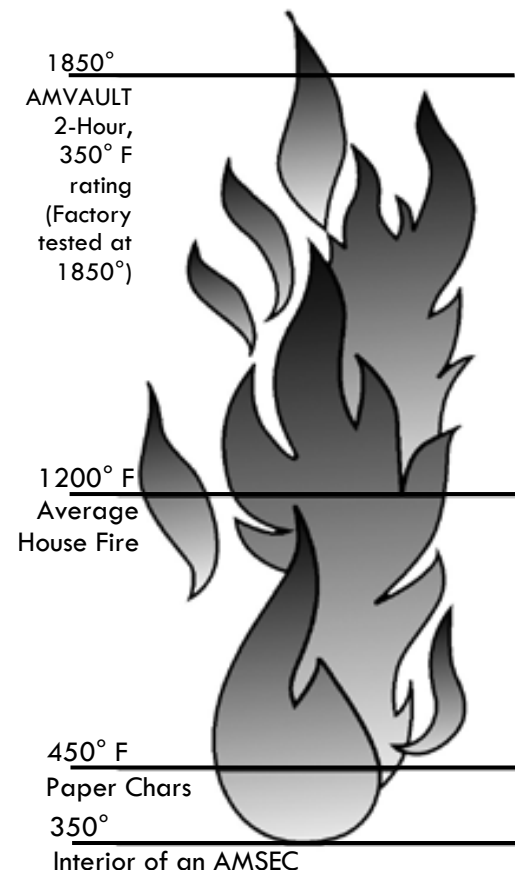

Pricing:

| Model No. | Inside H x W x D | Outside H x W x D* | Cubic Inch Capacity | Wt. Lbs | Interior Shelves | Retail | Mathias |
|--------------|------------------|--------------------|---------------------|---------|------------------|------------|-------------------|
| TL-15 | | | | | | | |
| CE1814** | 18 x 14 x 12 | 25 x 21 x 21-1/2 | 1.8 | 700 | 1 | \$2,840.00 | \$2,462.28 |
| CE2518 | 25 x 18 x 16 | 32 x 25 x 25-1/2 | 4.2 | 1,110 | 1 | \$3,245.00 | \$2,813.42 |
| CE3524 | 35 x 24 x 20 | 42 x 31 x 29-1/2 | 9.7 | 1,720 | 2 | \$4,315.00 | \$3,741.11 |
| CE4524 | 45 x 24 x 20 | 52 x 31 x 29-1/2 | 12.5 | 2,060 | 3 | \$4,755.00 | \$4,122.59 |
| CE5524 | 55 x 24 x 20 | 62 x 31 x 29-1/2 | 15.3 | 2,410 | 3 | \$5,475.00 | \$4,746.83 |
| CE6528 | 65 x 28 x 20 | 72 x 35 x 29-1/2 | 21.1 | 3,028 | 4 | \$6,485.00 | \$5,622.50 |
| CE7236 | 72 x 36 x 23 | 79 x 43 x 32-1/2 | 34.5 | 4,000 | 4 | \$8,140.00 | \$7,057.38 |
| TL-30 | | | | | | | |
| CF1814** | 18 x 14 x 12 | 25 x 21 x 21½ | 1.8 | 710 | 1 | \$3,275.00 | \$2,839.43 |
| CF2518 | 25 x 18 x 16 | 32 x 25 x 25½ | 4.2 | 1,125 | 1 | \$3,970.00 | \$3,441.99 |
| CF3524 | 35 x 24 x 20 | 42 x 31 x 29½ | 9.7 | 1,764 | 2 | \$4,910.00 | \$4,256.97 |
| CF4524 | 45 x 24 x 20 | 52 x 31 x 29½ | 12.5 | 2,100 | 3 | \$5,475.00 | \$4,746.83 |
| CF5524 | 55 x 24 x 20 | 62 x 31 x 29½ | 15.3 | 2,474 | 3 | \$6,300.00 | \$5,462.10 |
| CF6528 | 65 x 28 x 20 | 72 x 35 x 29½ | 21.1 | 3,206 | 4 | \$7,485.00 | \$6,489.50 |
| CF7236 | 72 x 36 x 23 | 79 x 43 x 32½ | 34.5 | 4,270 | 4 | \$9,700.00 | \$8,409.90 |



CF6528
SHOWN WITH OPTIONAL
INTERIOR LOCKERS



CF5524

* Add 2" to outside depth for handle, dial and hinge projection.
**Models 1814 can not be equipped with an auxiliary lock, 3-way bolt work or glass relock mechanism. Left Swing Models: After model #, use suffix L.

AMVAULT High Security Composite safes have passed Underwriter's Laboratories most recent testing procedures ensuring you today's best protection. AMVAULT TL-15 and TL-30 U.L. listed composite safes qualify for Mercantile & Broadform Insurance Class ER (TL-15) and F (TL-30) with a Bank Rating of BR (TL-15) and G (TL-30). Two Hour Class 350°F manufacturers' fire label. Standard finish is Parchment. Other colors available on request.

CALL TODAY TO ENHANCE YOUR SECURITY & PROTECT WHAT'S MOST IMPORTANT TO YOU

One of our security professionals can walk you through the system that will best suit your business & budget.

CALL: 303-573-9000 or 719-434-3460

FAX: 303-573-9099 or 719-465-5757

VISIT the WEB: www.mathias-security.com

EMAIL: sales@mathiaslockandkey.com